(19) World Intellectual Property Organization International Bureau



(43) International Publication Date 18 March 2004 (18.03.2004)

(10) International Publication Number WO 2004/022926 A1

(51) International Patent Classification7: F02C 6/12

F01D 17/16,

(21) International Application Number:

PCT/IB2002/003589

(22) International Filing Date:

5 September 2002 (05.09.2002)

(25) Filing Language:

English

(26) Publication Language:

English

(71) Applicant (for all designated States except US): HONEY-WELL INTERNATIONAL INC. [US/US], 101 Columbia Road, Morristown, NJ 07962 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): SAUSSE, Lorrain [FR/FR]; c/n Honeywell Garrett, B.P. 19 - Z.I. Route d'Oncourt, F-88150 Thaon-les-Vosges (FR). JECKEL, Denis [FR/FR]; c/o Honeywell Garrett, B.P.19 - Z.I. Route d'Oncourt, F-88150 Thaon-les-Vosges (FR). FIGURA, Georgio [FR/FR]; c/o Honeywell Garrett, B.P.19 -Z.I. Route d'Oncourt, F-88150 Thuon-les-Vosges (FR). DECHANET, Eric [FR/FR]; c/o Honeywell Garrett, B.P.19 - Z.I. Route d'Oncourt, F-88150 Theon-les-Vosges

(74) Agents: CHIVAROV, Georgi et al.; TBK-Patent, Bavariaring 4-6, 80336 München (DE).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EF, ES, FI, GB, GD, GE, GH, GM, IIR, IIU, ID. IL, IN, IS, IP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW). Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, Cl. CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

with international search report

[Continued on next page]

(54) Title: TURBOCHARGER COMPRISING A VARIABLE NOZZLE DEVICE

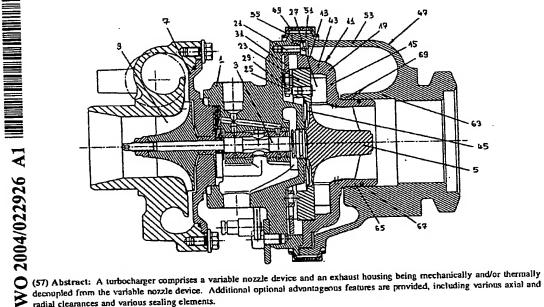

decoupled from the variable nozzle device. Additional optional advantageous features are provided, including various axial and radial clearances and various sealing elements.